



REZNOR

VRBD⁴

Gas Fired Unit Heaters




ErP Lot 21
Seasonal Efficiency
compliant

 **NORTEK**TM
GLOBAL HVAC




VRBD Technical Data


		Model		
		95	120	145
Nominal Heat Output	kW	89	119	137
Airflow	M ³ /h	8,136	11,088	13,608
Temp Rise	K	34	32	32
Throw	M	64	76	78
Gas Consumption				
Natural Gas G20	M ³ /h	10.39	13.8	15.77
Propane G31	kg/h	7.8	10.17	11.62
Gas Connection	Rc	3/4"	3/4"	3/4"
Electrical Supply	V/ph/Hz	230/240V 1N ~ 50Hz		
Total Electrical Rating	W	880	1730	2330
Mounting Heights	m	5	6	6
Maximum flue run		9 Metres		
Noise level	dB(A)	62	63	68
Net Weight	kg	203	242	279

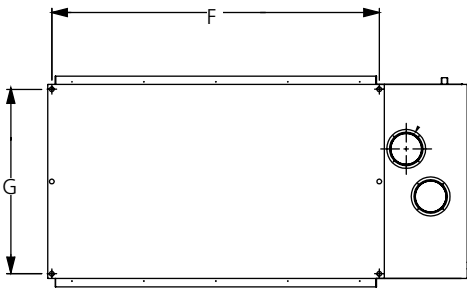


Plan view

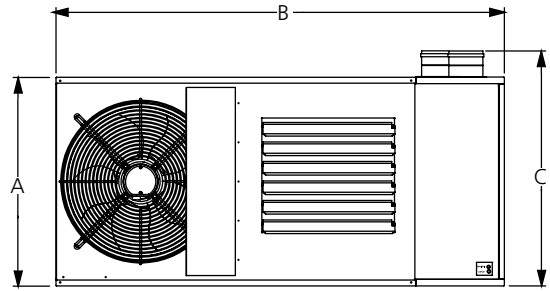

Front view

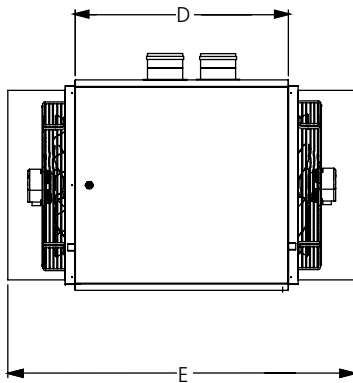

Side view

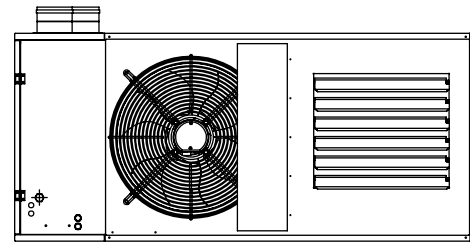

Back view

VRBD Dimensions

		95	120	145
Unit height	A	800	980	1150
Unit length	B	1750	1750	1750
Total height	C	900	1080	1250
Unit width	D	810	810	810
Total width	E	1321	1321	1321
Suspension points	F	1365	1365	1365
Suspension points	G	770	770	770
Flue and Combustion air collars	Ø	130	130	130
Top clearance		300	300	300
Bottom clearance		300	300	300
Left-hand side clearance		250	250	250
Right-hand side clearance		950	950	950

GB/REZVRBD/01/1/1017



Registered in England No. 01390934 | Registered Office The Colmore Building, Colmore Circus Queensway Birmingham B4 6AT

Nortek Global HVAC is a registered trademark of Nortek Global HVAC Limited. Because of continuous product innovation, Nortek Global HVAC reserves the right to change product specification without due notice.

NORTEK GLOBAL HVAC (UK) LTD

Fens Pool Avenue

Brierley Hill

West Midlands DY5 1QA

United Kingdom

Tel: +44 (0)1384 489 250

Fax: +44 (0)1384 489 707

reznorsales@nortek.com

www.reznor.co.uk